


brix-P-Coating (4-Pack)

300 Microns



brix-P-Coating is a solvent free, polyurethane wearing/seal coat designed for use with brix P flooring systems

brix-P-coating is designed primarily for sealing brix-P systems to create a seamless transition between the cove and the floor. brix-P-Coating is also used to seal brix-P (SR) systems where an anti-slip aggregate has been broadcast into a brix P-MF finish for a textured profile.

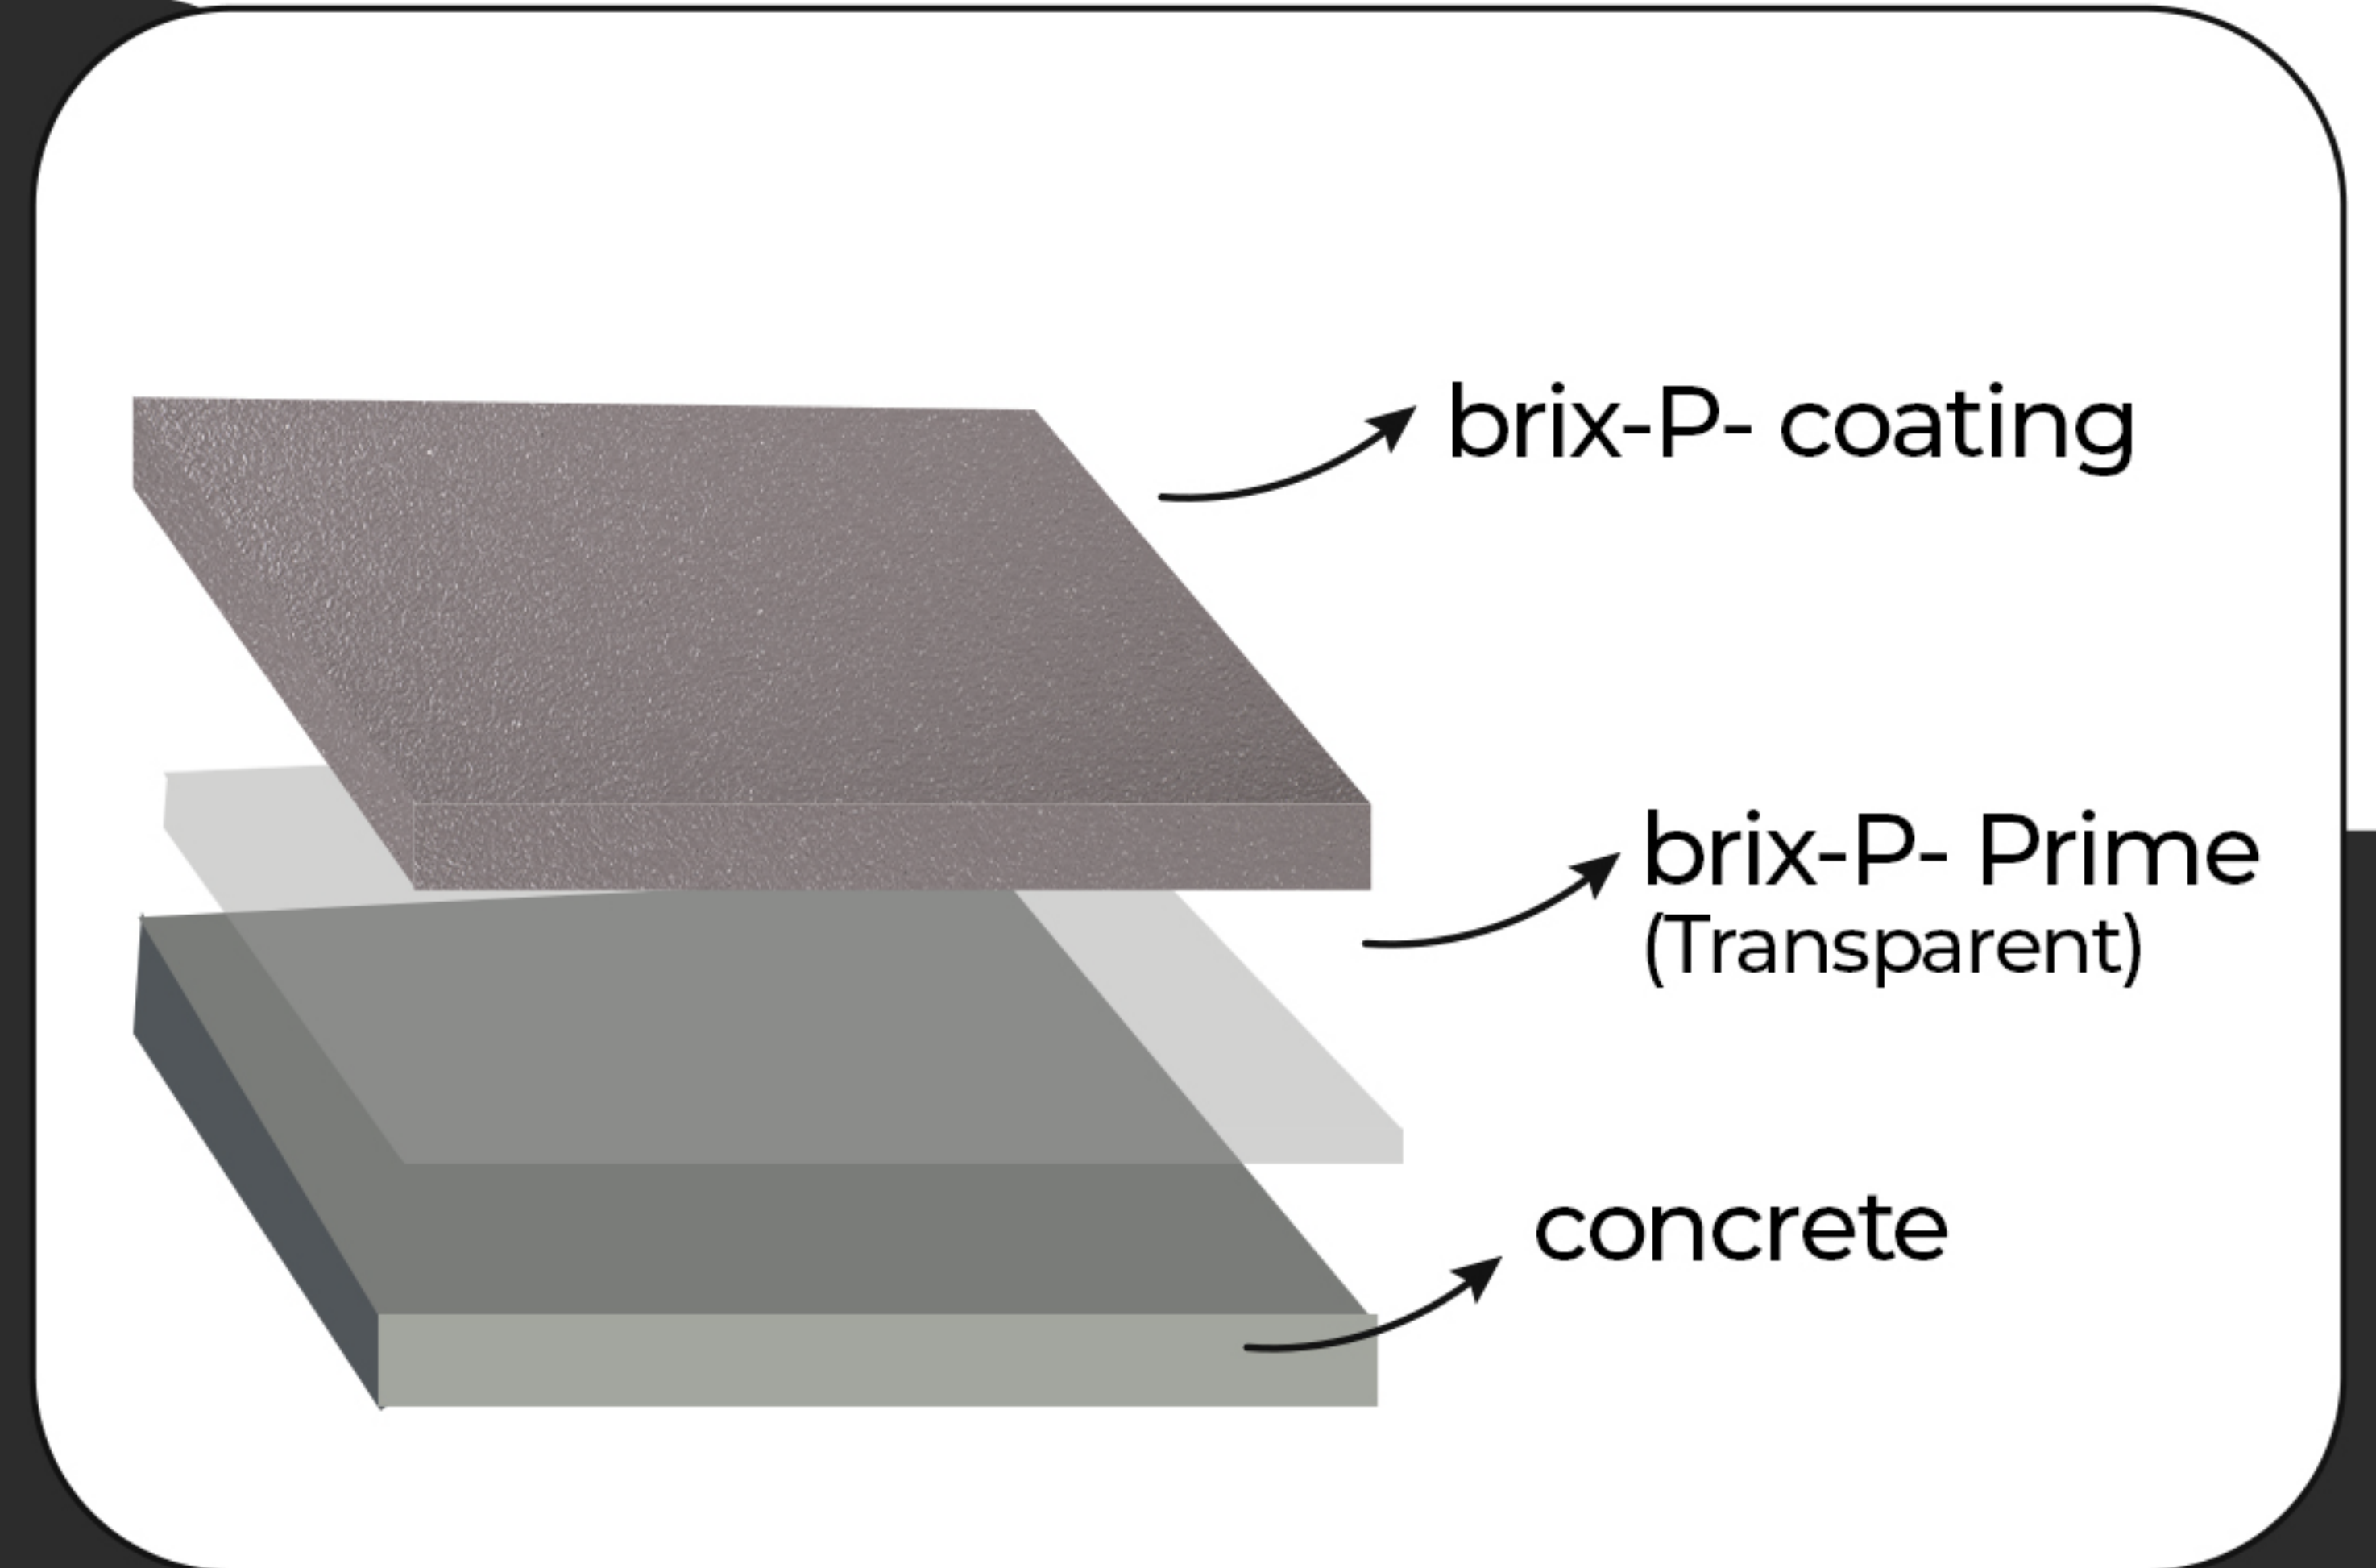

Working Time

~10 – 15 minutes @ 25°C (usable working life of material following mixing and immediate spreading as per the application instructions).

Coverage

The recommended coverage of brix-P-Coating is 0.5 kg/m² - 1.0 kg/m².

These coverages are theoretical and may vary due to a number of factors including the condition of the substrate. A recommended 5% wastage addition is advised on all orders.

Specific Gravity

1.50 g/cm³ @ 25°C

The material has been designed for use in industrial applications subject to exposure to chemicals and mechanical loading.

Overcoating Time

~12 – 24 hours @ 25°C (some mechanical preparation maybe required).

Speed of Cure

- Light Foot Traffic – 12 hours
- Light Wheeled Traffic – 24 hours
- Heavy Duty Traffic – 48 hours
- Full Chemical Cure – 7 days

Storage

All components should be stored off the ground, in a cool dry area, away from direct sunlight between 10 – 30°C

Shelf Life

12 months in the closed original container

brix-P-Coating (4-Pack)

300 Microns



Colors



Buff



Tile Red



Green



Cream



Silver Grey



Goosewing Grey



Light Grey [RAL 7035]



Grey



RAL 5012



Mustard

brix-P-Coating (4-Pack)

300 Microns



Typical Properties

BS 8204-6 (FeRFA)		Type 3
Temperature Resistance	Dependent on the system build-up.MF: up to 70°C, SR: up to 90°C	
Fire Resistance	EN 1350-1	BfIS1
Co-efficient of Thermal Expansion	ASTM C531	5.8 x 10-5/°C
Slip Resistance	Dependent on the system build-up and grade of aggregate broadcast.	
Abrasion Resistance	EN 13892-4 BS 8204-2	AR 0.5 Special Class
Adhesion	EN ISO 4634	> 1.5 N/mm2
Low Emissions	ISO 1600-3, 6, 9 and EN 16516	Compliant

The typical physical properties given above are derived from testing in a controlled laboratory environment at 20°C. Results derived from testing field applied samples may vary dependent upon site conditions. The slip resistance figures given above are affected by application techniques and prevailing site conditions. Slip resistance can reduce over time due to poor maintenance, general wear or surface contaminants. Good housekeeping practices should be observed.

brix-P-Coating (4-Pack)

300 Microns



Application Temperature Range

~10 – 30°C is recommended. Outside of this range, heating or cooling equipment should be used to achieve ambient conditions.

The substrate, before priming, should be at least 3°C above the dew point to reduce the risk of condensation or blooming. This should be maintained for 48 hours after application.

Working Time

~10 – 15 minutes @ 25°C (usable working life of material following mixing and immediate spreading as per the application instructions).

Substrate Requirements

brix-P systems are suitable for application on cementitious substrates and suitable polymermodified screeds.

All substrates should be capable of bearing loads, free of cracks and voids as well as free from laitance, dust and other contamination including dirt, oil, grease, coatings, and surface treatments.

The substrate should be sound with a minimum compressive strength of 25 N/mm² and a minimum tensile strength (pull-off) of 1.5 N/mm².

Substrate Preparation

Concrete or suitable polymer modified screed substrates should be mechanically prepared using captive vacuum enclosed shot blasting, or by appropriate diamond grinding to remove surface

cement based laitance and previous surface treatments leaving an open textured mechanically prepared surface. Weak concrete / polymer modified screed must be removed and repaired using recommended products. In order to ensure the installed system remains fully bonded to the substrate it is recommended that all terminating edges are rebated to produce a cross-section "anchor chase" of 5.0 mm deep by 5.0 mm wide, stepped out at 150.0 mm from and parallel with the walls i.e. day joints, movement joints, floor edges, door thresholds, upstands, plinths, etc.

Application Instructions

Mixing

The contents of the brix-P-Pigment Pack D should be drained into the brix-P-Coating A component and the two materials are thoroughly mixed until homogenous before adding the contents of brix-P-Coating B. The mixed liquid should then be poured into a clean suitably sized separate mixing container and the brix-P-Coating Filler C aggregate component slowly added under constant mixing using a suitable slow speed electric mixer fitted with either a single or double mixing paddle or by using a forced action (rotary drum) type compulsory mixer until a uniform free flowing consistency has been achieved.

Application Instructions

Application

Apply the mixed brix-P-Coating screed by hard or soft rubber squeegee. Immediately roll the PU Coating with a short-piled microfiber roller in one direction. The ponding of material should be avoided. To finish roll again in one direction with the microfiber roller. The drying time for seams is approximately 5 - 7 minutes (at 20°C and 50% rel. humidity – higher temperatures and higher humidity will shorten the drying time). Ensure to maintain continuity of wet material between pours. For cleaning of tools and other contaminants use Tool Cleaner.

Overcoating

Overcoating should be carried out within 24 hours of application. If longer than 24 hours it will be necessary to lightly grind the surface by mechanical means before overcoating is carried out.

Application Notes

- The installed floor should be protected from other trades using Kraft paper or similar breathable material e.g. Correx sheet. Polythene should not be used.
- Protect the installed floor finish from damp, condensation, and water for at least 24 hours at 20°C.
- Ensure that the ambient temperature remains above 10°C for at least twenty-four hours after installation.

- As with all aromatic based polyurethane products light colors exposed to UV light, PU systems will be prone to cosmetic discoloration (yellowing of the surface), however this does not affect the physical or chemical resistance properties of the installed product.

Cleaning & Maintenance

The cleaning and maintenance of **brix-P** systems must be considered a vital and integral part of an overall hygiene program covering all areas of the processing plant. Regular cleaning and maintenance will ensure that the floor maintains the performance profile listed below.

The method of cleaning and choice of cleaning equipment and / or agent should match the soil conditions and level of sanitation required.

All brix-P systems will withstand water wash down processes at continuous sanitizing temperatures as well as fumigation. brix-P-RT can be cleaned

Further Information

Information relating to the safe handling of this product can be found in the Material Safety Data Sheet. Local regulations concerning the safe handling of resin-based coating materials must be observed. Suitable protective clothing including suitable eye protection must be worn at all times. All consumptions listed are for recommendation purposes only. Detailed application instructions and system build-up advice can be provided on request through our Technical Services team. Brix products are guaranteed against defective material and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request.

